


FOR SAFE REFRIGERATION AND COOLING CIRCUITS


Hermetically sealed centrifugal pumps for CO₂-application for the refrigeration industry

- 40 bar design
- single or multistage design
- 100 % leakage free
- low noise level
- low maintenance costs
- great availability, long lifetime
- short delivery times


Hermetically sealed centrifugal pumps for CO₂-application for the refrigeration industry

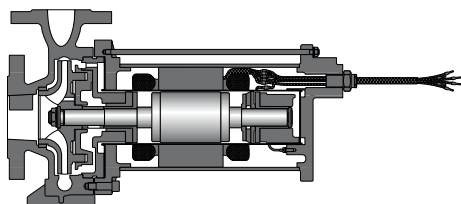

Series CNF

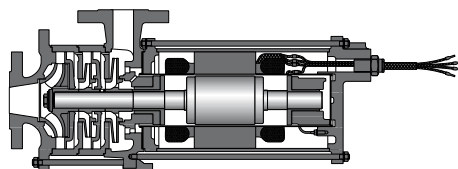

Series CAM

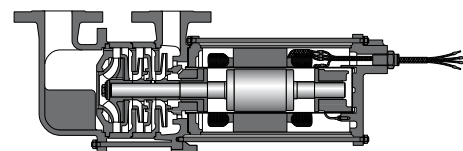

Series CAMR

Application ranges

■ Nominal pressure	40 bar
■ Test pressure	60 bar
■ Operating temperature*	-50 °C up to -5 °C
■ Capacity	up to 50 m ³ /h
■ Head	up to 130 m Fls
■ Flanges	ace. to DIN EN 1092-2 PN 40 bar form D

* higher or lower temperatures are available on request

References for the refrigeration industry

JOHNSON CONTROLS INTERNATIONAL, Amberger Kühltechnik GmbH, AXIMA REFRIGERATION GmbH, FKW GmbH, HARIG GmbH, Hof Sonderanlagenbau GmbH, Huppmann AG, Kreuzträger Kältetechnik GmbH & Co. KG, KTI - Plersch Kältetechnik GmbH, Kühlanlagenbau Nord GmbH, Linde AG, TLB Tiefkühl-Lager-Betriebs GmbH, GEA Grecco Kolteteknik A/S, AIR LIQUIDE, GEA Matal, Teknotherm A/S, Walter Wettstein AG, GTI Koudetekniek B.V., ...

Please contact our sales team for detailed information
to ask for CO₂-application



HERMETIC-Pumpen GmbH · D-79194 Gundelfingen
hermetic@hermetic-pumpen.com · www.hermetic-pumpen.com